




V5 card reader for Yanga fountain

1 or 2 input machine (granted/refused)

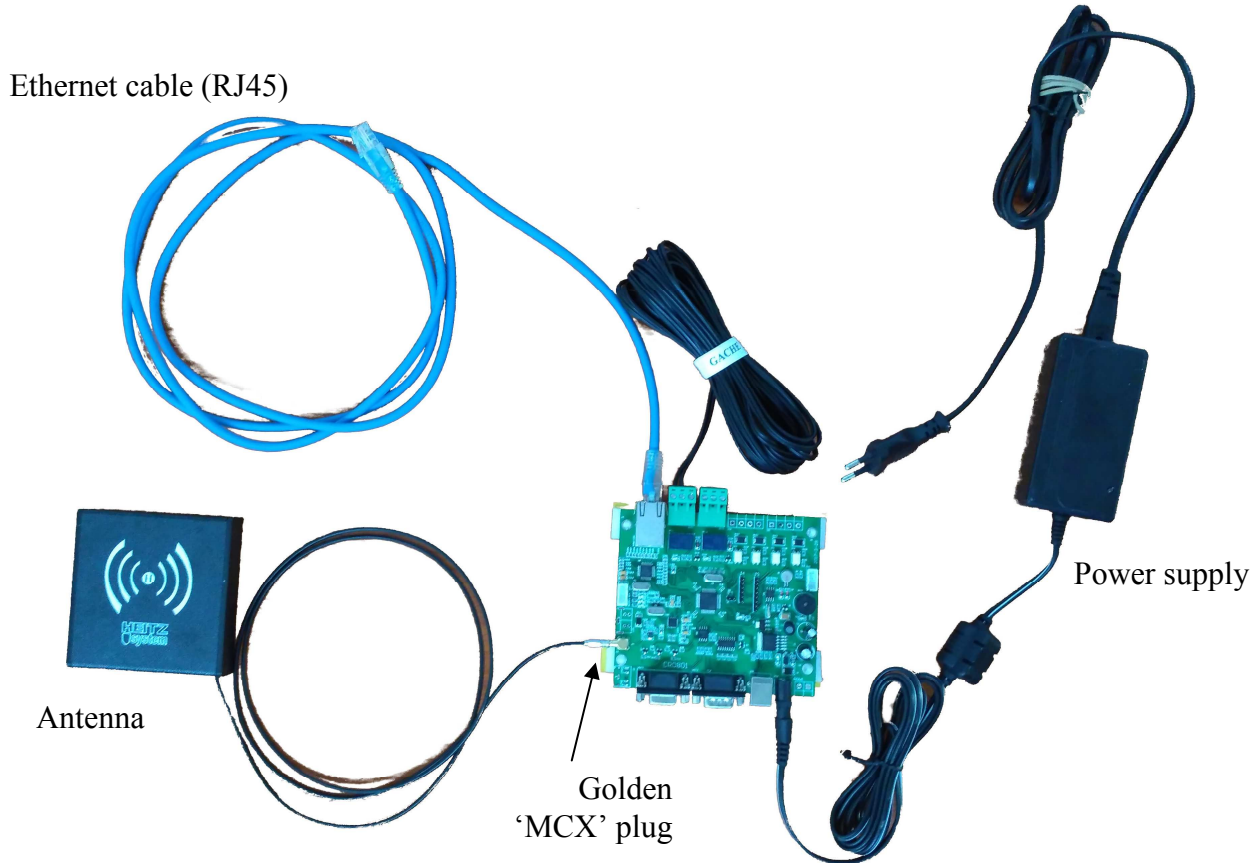

Antenna : this box with radio logo must be set outside the machine, this face front; customers has to put card on it to get drink
reader blinks blue slowly when powered, blinking must change on card swipe : green if granted, fast blue blinking if no computer answer

Ethernet cable : to wall plug to same network as computers

1 input machine version :

Relay 1 (A) will close circuit on card granted

2 inputs machine version :

Relay 1 (A) will close circuit on card granted

Relay 2 (A) will close circuit on card refused

Relay sequence : wire center and right (pin 2 and 3)

Relay 1 test button : short time link on pin 1 and 2 (C)

